



DAILY

70C15/E4 TWIN REAR WHEELS

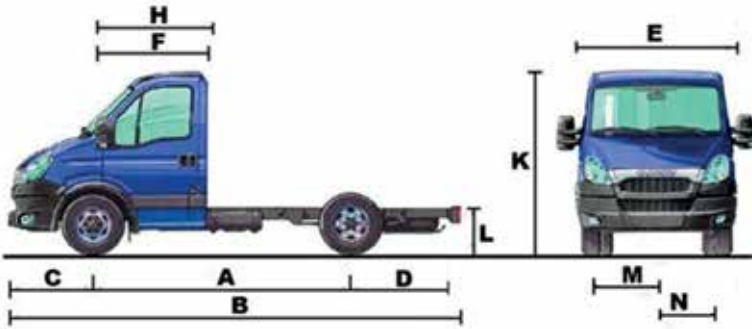

DIMENSIONS (mm)		
A	Wheelbase	4350
B	Maximum length	7340
C	Front overhang	998
D	Rear overhang	1890
E	Maximum cab width	2060
F	Front axle/Rear cab	1355
H	Front axle/Front body	1410
K	Overall height (unladen)	2330
M	Front track	1725
N	Rear track	1661
L	Unladen frme height at rear of frame	851
	Front ground clearance	171
	Rear ground clearance	165
	Turning circle: kerb/kerb	14620
	Turning circle: wall/wall	16120
Body dimensions		
	Body interior length	5240
	Maximum body width	2300

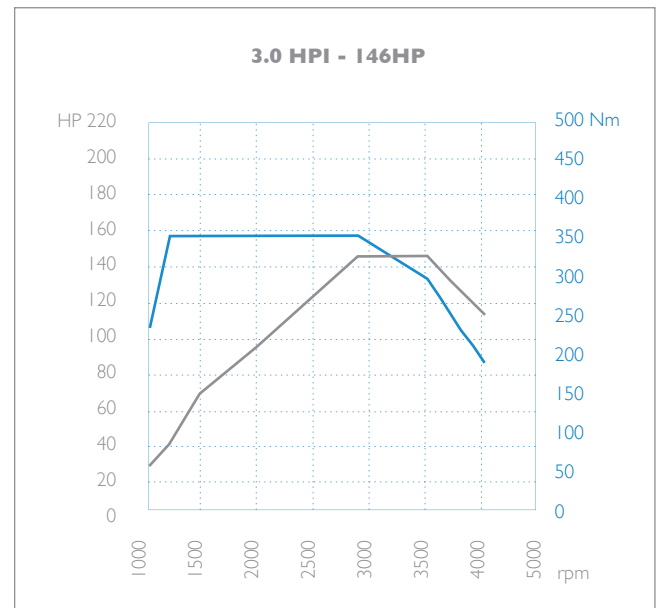

WEIGHTS (Kg*)	
GVM	7000
GCM	10500
Front axle capacity	2500
Rear axle capacity	5350
Kerb weight front axle (without body)	1495
Kerb weight rear axle (without body)	800
Kerb weight total (without body)	2295
Maximum body and payload capacity	4705

*Weights for van are with full fuel, oils, water, spare wheel and includes driver

ENGINE	
Type	FICE3481J 4 stroke diesel cycle-watercooled, DOHC - High pressure common rail direct injection - Turbocharger and intercooler + Wastegate - Cast-iron engine block with aluminium cylinder head - Suspended oil sump - Dual mass flywheel. Integrated vacuum and steering pumps. Glow plugs. Blow-by system
Number of cylinders	4 vertical in line
Bore (mm)	95.8
Stroke (mm)	104
Total displacement	2998 cm ³
Maximum output	146HP (107kW)
@ rpm	3000-3500
Max torque (Nm)	350
@rpm	1400-2600
EEC emissions regulation	Euro 4 LD

IVECO

DAILY 70C15/E4 TWIN REAR WHEELS

TRANSMISSION

Six speeds overdrive
Synchroneshed manual transmission
Push/pull cable control
Gear lever on dashboard
Performance rating (calculated value with standard tyres and axle ratio):

Gear	Gear ratio	Maximum geared speed (Km/h)	Gradeability at GV (%)
1st	5.37	-	>30
6th	0.79	120 (speed limiter)	-

Power take-off: Facility for side mounted PTO.
Maximum torque output: 180Nm

CLUTCH

Type	Single dry plate hydraulic
External diameter (mm)	279.5 (11")

FRAME

"C"-Section steel longitudinal side members and tubular cross members. (Fe 420, dimensions 184x69x5)
Anti-corrosion process with full cathoretic dipping and galvanised box sections

STEERING

Type	Hydraulically assisted, rack and pinion type
Steering wheel diam (mm)	420, lock

AXLES

Front	Independent wheels
Rear	Rigid, bevel and crown, single reduction
Axle ratio standard	4.556

SUSPENSION

Front	Independent with torsion bar. Anti-roll bar is standard
Rear	Semi-elliptic leaf springs and rubber rebound bumpers Anti-roll bar is standard
Shock absorbers front and rear	Heavy duty hydraulic telescopic

WHEELS AND TYRES (Standard)

Tyres (6+1 spare)	225/75R16
Wheels	6J - 16H2

ELECTRICAL SYSTEM

CAN Bus digital communication line	
Battery	12V-110Ah
Alternator	110A
Starter motor output	2.3 kW

BRAKING SYSTEM

Front and rear	Ventilated disc brakes
Brake disc diam (mm) Front	301
Brake disc diam (mm) Rear	306
Brake calipers (mm)	2x60/2x48

SERVICE AND EMERGENCY BRAKES

Dual circuit with vacuum servo
Floating disc caliper with auto wear adjustment
Brake level pad front/rear wear indicators
Asbestos free pads
Emergency brake built into the service brake system
Parking brake: Manual brake operating on rear wheels

CAB

Two person semi-forward type cabin (driver + 1 (2 passengers optional)
Pressed steel unitary construction body mounted on rubber bushes
Anti-corrosion protection for all body
Protective anti-abrasion undercoating
Modular type van construction made entirely of steel for all roof heights.
Internal step on sliding side door and full width rear access step to cargo area.
Laminated windscreen
Full bulkhead behind driver
Rear doors opening 180°
Steel plate loading floor
Driver seat 2 way adjustable, wrap-around back support upholstered in heavy duty cloth and headrest
Single passenger seat + headrests
3 points safety belts
Adjustable sun visors
Outside rear view mirrors on both sides + integrated wide-angle mirror and turn indicator lights
Dashboard made of soft-feeling anti-reflective material with:

- Analogue electronic speedometer
- Electronic rev counter
- Fuel level indicator with reserve light indicator
- Engine water temperature indicator with high temperature indicator light

Digital display with:

- Kilometre counter (trip and total)
- Clock
- Instrument light dimmer switch
- Illuminated ashtray compartment with cigarette lighter

Indicator lights to monitor all vehicle functions
All lighting and signals EEC standard
Glove/storage compartments
Climate control (hot/fresh air)
Windshield wipers

OTHER EQUIPMENT

Spare wheel inside cargo area, behind left wheel arch
100 litres shaped fuel tank, with fuel filter on cab pillar, with key lock
Front recovery eye
Exhaust pipe with manifold longitudinally positioned on the right side with stub-pipe outlet placed within the side members

IVECO

WWW.IVECO.CO.ZA