


DAILY


70C15/E4D TWIN REAR WHEELS

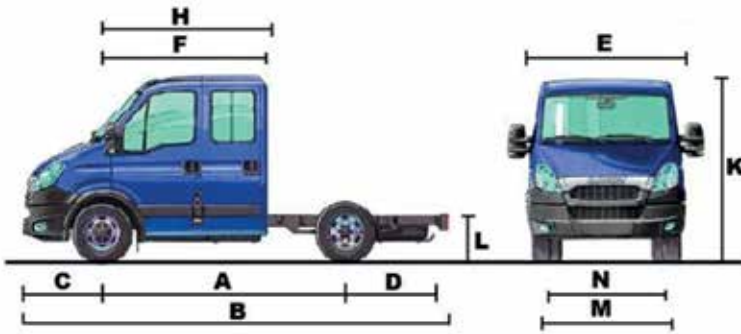

DIMENSIONS (mm)

A	Wheelbase	4350
B	Maximum length	7340
C	Front overhang	998
D	Rear overhang	1890
E	Maximum cab width	2060
F	Front axle/Rear cab	2105
H	Front axle/Front body	2160
K	Overall height (unladen)	2345
M	Front track	1725
N	Rear track	1661
L	Unladen frame height at rear of frame	851
	Front ground clearance	171
	Rear ground clearance	165
	Turning circle: kerb/kerb	14620
	Turning circle: wall/wall	15020
Body dimensions		
	Body interior length	4550
	Maximum body width	2300

3.0 HPI - 146HP

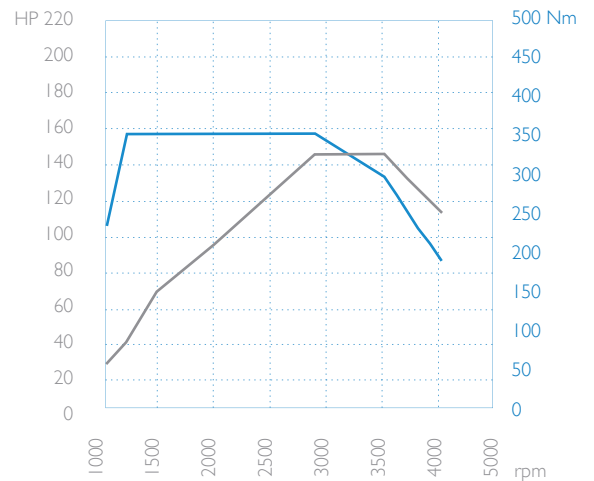

ENGINE

Type	FICE3481J 4 stroke diesel cycle-watercooled, DOHC - High pressure common rail direct injection - Turbocharger and intercooler + Wastegate - Cast-iron engine block with aluminium cylinder head - Suspended oil sump - Dual mass flywheel. Integrated vacuum and steering pumps. Glow plugs. Blow-by system
Number of cylinders	4 vertical in line
Bore (mm)	95.8
Stroke (mm)	104
Total displacement	2998 cm ³
Maximum output	146HP (107kW)
@ rpm	3000-3500
Max torque (Nm)	350
@rpm	1400-2600
EEC emissions regulation	Euro 4 LD

WEIGHTS (Kg*)

GVM	6700
GCM	10200
Front axle capacity	2500
Rear axle capacity	5350
Kerb weight front axle (without body)	1615
Kerb weight rear axle (without body)	895
Kerb weight total (without body)	2510
Maximum body and payload capacity	4190

*Weights for van are with full fuel, oils, water, spare wheel and includes driver

IVECO

DAILY 70C15/E4D TWIN REAR WHEELS

TRANSMISSION

Six speeds overdrive
Synchroneshed manual transmission
Push/pull cable control
Gear lever on dashboard
Performance rating (calculated value with standard tyres and axle ratio):

Gear	Gear ratio	Maximum geared speed (Km/h)	Gradeability at GVM (%)
1st	5.37	-	>30
6th	0.79	120 (speed limiter)	-

Power take-off: Facility for side mounted PTO.
Maximum torque output: 180Nm

CLUTCH

Type	Single dry plate hydraulic
External diameter (mm)	279.5 (11")

FRAME

"C"-Section steel longitudinal side members and tubular cross members. (Fe 420, dimensions 184x69x5)
Anti-corrosion process with full cathophoretic dipping and galvanised box sections

STEERING

Type	Hydraulically assisted, rack and pinion type
Steering wheel diam (mm)	420, lock

AXLES

Front	Independent wheels
Rear	Rigid, bevel and crown, single reduction
Axle ratio standard	4.556

SUSPENSION

Front	Independent with torsion bar. Anti-roll bar is standard
Rear	Semi-elliptic leaf springs and rubber rebound bumpers Anti-roll bar is standard
Shock absorbers front and rear	Heavy duty hydraulic telescopic

WHEELS AND TYRES (Standard)

Tyres (6+1 spare)	225/75R16
Load index	121/120
Wheels	6J - 16H2

ELECTRICAL SYSTEM

CAN Bus digital communication line	
Battery	12V-110Ah
Alternator	110A
Starter motor output	2.3 kW

BRAKING SYSTEM

Front and rear	Ventilated disc brakes
Brake disc diam (mm) Front	301
Brake disc diam (mm) Rear	306
Brake calipers (mm)	2x60/2x48

SERVICE AND EMERGENCY BRAKES

Dual circuit with vacuum servo
Floating disc caliper with auto wear adjustment
Brake level pad front/rear wear indicators
Asbestos free pads
Emergency brake built into the service brake system
Parking brake: Manual brake operating on rear wheels

CAB

6 + 1 person semi-forward type
Crew cabin (driver + 2 passengers) in front and 4 in rear
Pressed steel unitary construction body mounted on rubber bushes
Laminated windscreen
Cabin doors with large storage pockets
2 + 2 rear cabin doors + sliding windows
Cabin flooring covered in one piece synthetic mat
Adjustable sun-visors
Rear panel with small window
Cabin light placed at centre of ceiling with courtesy spotlight and additional light in rear
4 passenger bench seat in rear with built in storage box
Driver seat adjustable for height, reach and rake wrap-around back support upholstered in heavy duty cloth and headrest
All seats with headrest + safety belts
Outside rear view mirrors on both sides + integrated wide-angle mirror and turn indicators lights
Dashboard made of soft-feeling anti-reflective material with:

- Analogue electronic speedometer
- Electronic rev counter
- Fuel level indicator with reserve light indicator
- Engine water temperature indicator with high temperature indicator light

Digital display with:

- Kilometre counter (trip and total)
- Clock
- Instrument light dimmer switch
- Illuminated ashtray compartment with cigarette lighter

Indicator lights to monitor all vehicle functions
All lighting and signals EEC standard
Glove/storage compartments
Climate control (hot/fresh air)
Windshield wipers

OTHER EQUIPMENT

Spare wheel under rear overhang
100 litres shaped fuel tank, with fuel filler on cab pillar, with key lock
Front recovery eye
Exhaust pipe with manifold longitudinally positioned on the right side with stub-pipe outlet placed within the side members

IVECO

WWW.IVECO.CO.ZA